


CMU WALL


SEAL CAVITY WITH CLOSED-CELL, EXPANDING FOAM. CUT FLUSH OR RECEDE 1/8". APPLY A PAINTABLE, HYBRID SEALANT OVER THE FOAM FILL.

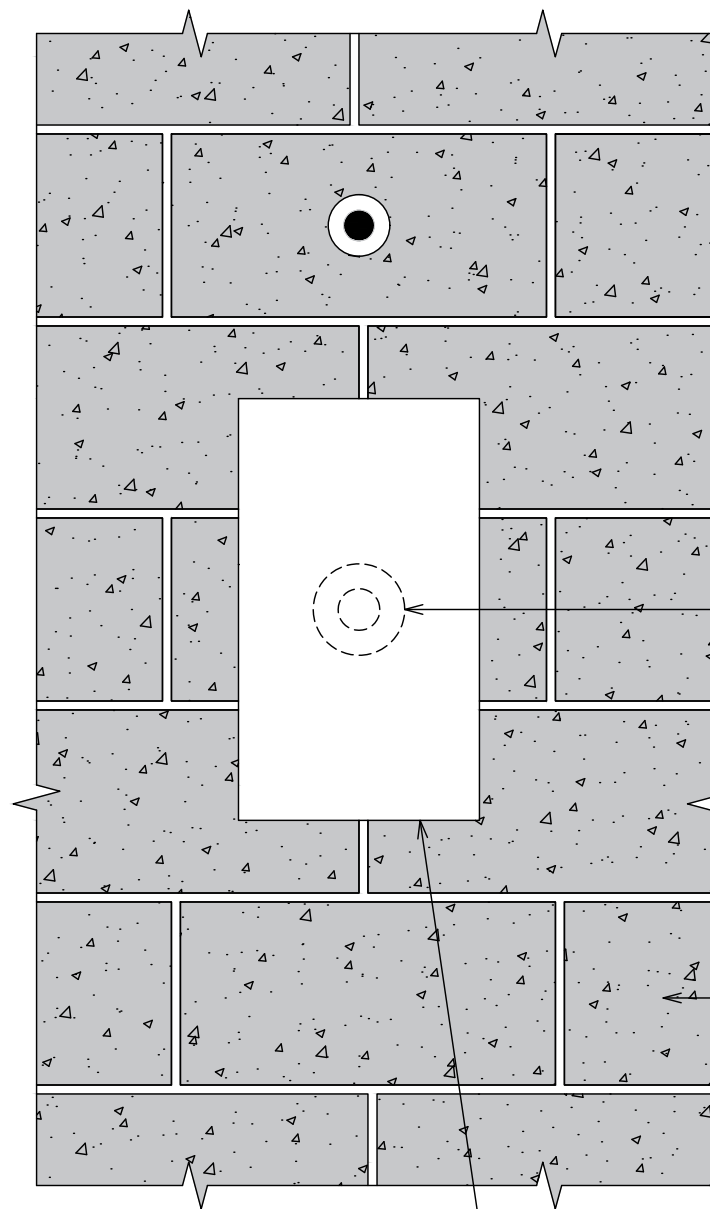

CMU WALL

ELECTRIC METER. FIELD VERIFY LOCATION.

SEE PIPE FLASHING DETAIL

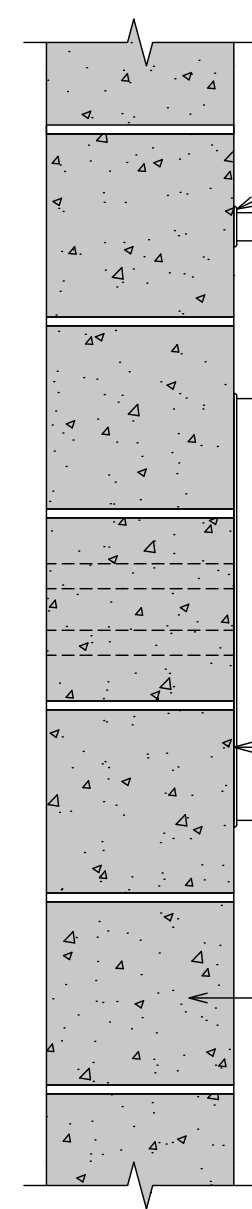












CMU WALL

SEE PIPE FLASHING DETAIL

ELECTRIC METER. FIELD VERIFY LOCATION.

APPLY SCRATCH AND BROWN COAT STUCCO AFTER SEALING CONDUIT PENETRATION. APPLY PRIMER AND COLOR COAT PRIOR TO INSTALLATION OF METER BOX.

LEGEND

-  SHEATHING, OSB, PLYWOOD, DENSGLASS
-  SELF ADHERED FLASHING
-  PLASTER ACCESSORY
-  DRAINAGE PLANE WATER RESISTANT BARRIER (WRB)
-  BOND BREAK WATER RESISTANT BARRIER (WRB)
-  SELF FURRING (SF) LATH
-  SCRATCH COAT
-  STUCCO
-  SILL SEAL
-  FOAM ORNAMENTALS
-  GALVANIZED METAL FLASHING

ELECTRICAL SERVICE INSTALLATION DETAIL



Florida Lath & Plaster Bureau (FLAPB) details are for illustration of construction methods. They are to be used as guidelines by the design and/or construction team. You should consult with your design and/or construction specialists for specific construction requirements. Some modification may be required for specific project conditions or to meet local building code. FLAPB makes no representation as to the suitability of any detail for specific use at any location on any project. A qualified, licensed architect or engineer must be consulted to specify the detail for any specific use at any location on a project.